


SHOCK

Scheda tecnica prodotto / Product datasheet

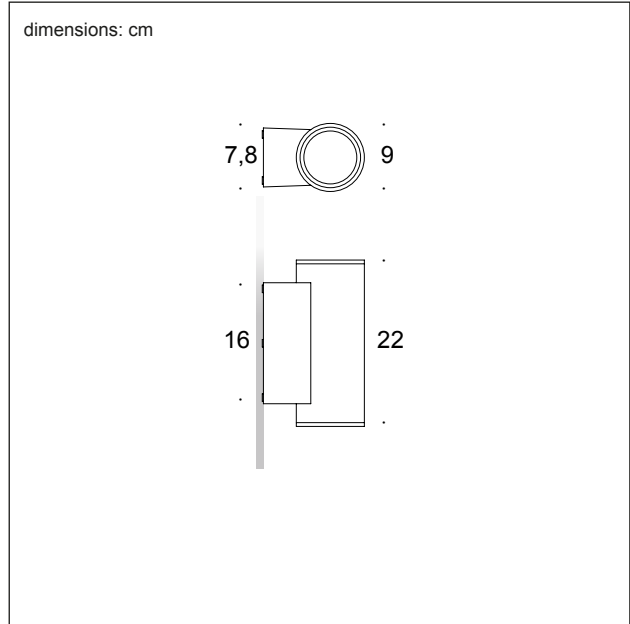

CODE
EST50000
EST50001

NAME
SHOCK

DESCRIZIONE PRODOTTO / PRODUCT DESCRIPTION

Proiettore da esterno da parete, corpo in alluminio trattato e verniciato, con vetri temperati di sicurezza. Sorgente luminosa led ad alta efficienza, tonalità 3000K, completa di driver. Emissione Up/Down.
Outdoor, wall-mounted floodlight, treated and painted aluminium body, with empered safety glass. High efficiency LED light source, 3000K tone, complete with driver. Up/Down lighting version.

MONTAGGIO / MOUNTING:


Proiettore da esterno / Outdoor, wall-mounted floodlight

CARATTERISTICHE PRODOTTO / PRODUCT CHARACTERISTICS :

Ambiente utilizzo / Environment:	Esterno / Outdoor
Colore / Colour:	Grey-White
Materiale / Material:	Aluminium
Orientabile / Adjustable:	No
Angolo di apertura / Beam angle (°) :	40°+40°
Tensione di alimentazione / Input Voltage (V):	220-240
Potenza assorbita / Power (W):	2x12
Sorgente luminosa / Light source	COB LED
Flusso luminoso / Luminous flux (lm):	2280
Temperatura colore / Colour temperature (K):	3000
CRI:	>80
Classe energetica / Energy class:	LED (A++;A+;A)

DATI FOTOMETRICI / PHOTOMETRIC DATE

Warm White 40°

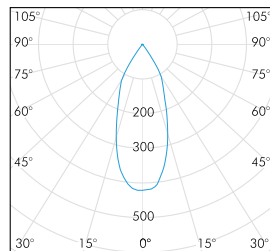

0.40	0.29	2362
0.80	0.57	591
1.20	0.86	262
1.60	1.15	148
2.00	1.44	94

cd/klm
— C0 - C180 — C90 - C270

Dati fotometrici disponibili (eulumdat) / Available photometric date (eulumdat) - www.sibillaled.it

SIMBOLI / SYMBOLS:



Per l'installazione del prodotto consultare il manuale di istruzioni/ Please consult the instruction manual for detailed installation instruction



Pan International s.r.l.
via G. Michelucci, 1
50028 Tavarnelle Val di Pesa
Firenze (Italy)

Tel: +39 (0)55 80 59 336
+39 (0)55 80 59 337
Fax: +39 (0)55 80 59 338
E-mail: panint@panint.it
Website: www.sibillaled.it

ALL RIGHTS RESERVED - THIS DRAWING OR PART THEREFOR MAY BE NOT REPRODUCED IN ANY FORM, TRANSFERRED TO THIRD PARTIE WITHOUT THE PERMISSION OF PAN INTERNATIONAL S.R.L.

updated 23.11.2016
pag. 1/1