


SHOCK

Scheda tecnica prodotto / Product datasheet

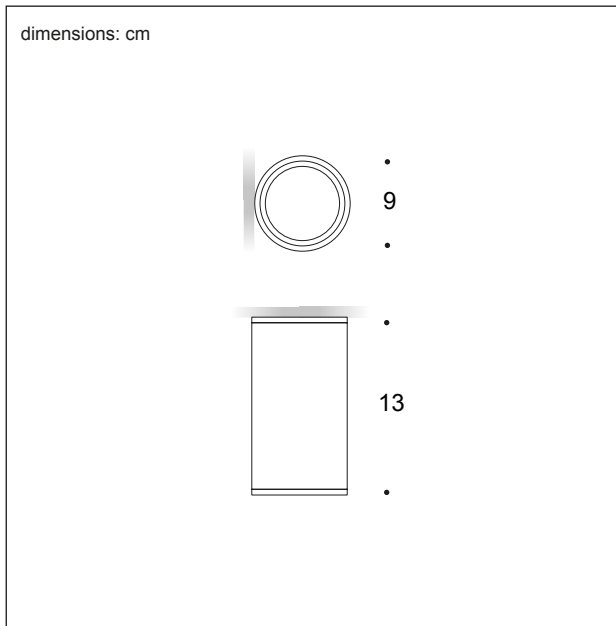

CODE

EST51011
EST51012

NAME

SHOCK

DESCRIZIONE PRODOTTO / PRODUCT DESCRIPTION

Proiettore da esterno da soffitto, corpo in alluminio trattato e verniciato, con vetri temperati di sicurezza. Sorgente luminosa led ad alta efficienza, tonalità 3000K, completa di driver.

Outdoor ceiling floodlight, treated and painted aluminium body, with tempered safety glass. High efficiency LED light source, 3000K tone, complete with driver.

MONTAGGIO / MOUNTING:


Proiettore da esterno / Outdoor, wall-mounted floodlight

CARATTERISTICHE PRODOTTO / PRODUCT CHARACTERISTICS :

Ambiente utilizzo / Environment:	Esterno / Outdoor
Colore / Colour:	Grey-White
Materiale / Material:	Aluminium
Orientabile / Adjustable:	No
Angolo di apertura / Beam angle (°) :	40
Tensione di alimentazione / Input Voltage (V):	220-240
Potenza assorbita / Power (W):	12
Sorgente luminosa / Light source	COB LED
Flusso luminoso / Luminous flux (lm):	1140
Temperatura colore / Colour temperature (K):	3000
CRI:	>80
Classe energetica / Energy class:	LED (A++;A+;A)

DATI FOTOMETRICI / PHOTOMETRIC DATE

Warm White 40°

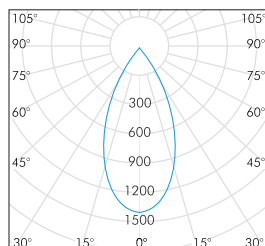

cd/klm
— C0 - C180 — C90 - C270

1.0	0.86	1463
1.5	1.72	365
2.0	2.58	162
2.5	3.44	91
3.0	4.30	58

Dati fotometrici disponibili (eulumdat) / Available photometric date (eulumdat) - www.sibillaled.it

SIMBOLI / SYMBOLS:



Per l'installazione del prodotto consultare il manuale di istruzioni/ Please consult the instruction manual for detailed installation instruction



Pan International s.r.l.
via G. Michelucci, 1
50028 Tavarnelle Val di Pesa
Firenze (Italy)

Tel: +39 (0)55 80 59 336
+39 (0)55 80 59 337
Fax: +39 (0)55 80 59 338
E-mail: panint@panint.it
Website: www.sibillaled.it

ALL RIGHTS RESERVED - THIS DRAWING OR PART THEREOF MAY BE NOT REPRODUCED IN ANY FORM, TRANSFERRED TO THIRD PARTIES WITHOUT THE PERMISSION OF PAN INTERNATIONAL S.R.L.

updated 23.11.2016
pag. 1/1